

FUNCTIONS

- ON/OFF
- AUTO-ON / OFF
- RESET (set display to zero)
- mm/inch
- PRESET
(for entering a numerical value)
- LOCK function (key lock)
- HOLD
(storage of measured values)
- Reversal of counting direction
- DATA (data transmission)



Application:

- Small, handy, practical
- Ideal for mobile use in manufacturing and inspection and on site
- For small measuring depths in bores, grooves, channels, etc.


FEATURES

- High contrast analog display
- Locking screw above
- Lapped guideway
- Measuring surfaces made of steel
- Slide and beam made of hardened stainless steel
- Immediate measurements due to the Reference System
- Raised guideway for the protection of the scale
- Excellent resistance against dust, coolants and lubricants
- Dirt wipers are integrated in the slide
- **Digit height:** 11 mm
- **Data interface:** Integrated wireless
- **Energy supply:** Battery life approx. 3 years (approx. 0.5 in wireless mode)
- **IP protection category:** IP 67
- **Package contains:** battery, instruction manual, case

TECHNICAL DATA

Order no.	Type	Measuring range	Measuring range inch	Numerical increment	Error limit	Error limit inches (text)	Standard	Depth rod
		mm	inch	mm/inch	mm	inch		
4126751	30 EWRI	0 – 25	0 – 1"	0.01 / .0005"	0.02	.0008"	Factory standard	round

Order no.	a	b
	mm	mm
4126751	129	48

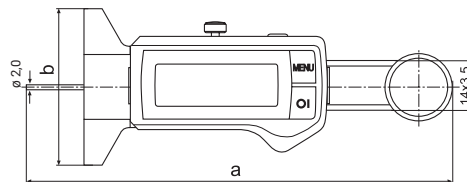

ACCESSORIES

Order no.	Product name	Type
4102220	Receiver for instruments with integrated wireless	i-Stick
4102520	Battery 3 V, CR 2032	



i-Stick